

Type LCA

FUNCTION

- 16 - (2) SPDT Mechanical Switch
 Rating: 30VDC - 1 Amp
 250VAC - 5 Amp
 Impedence: <50 mΩ
 Temperature: -40°C to +85°C
- 43 - (2) Slot Style Proximity Sensor
 Op Voltages (sensor dependent) 10 to 60VDC
 10 to 250VAC
 Op Current (sensor dependent) 2 to 400mA

ENCLOSURE

- 9 - Al Cover & Housing
- 8 - Clear ABS Cover & Al Housing*

CONDUIT

- 4 - (1) M20 x 1.5
 (Second M16 Entry Plugged)
- R - (1) M20 x 1.5 (central entry)
 (1) M16 x 1.5 (side entry)

OUTPUT DRIVE

N - NAMUR Output

INDICATOR

- R - RED CLOSED / GREEN OPEN
 (ABS material of construction)
- O - NO VISUAL INDICATOR


FEATURE

- XXX - Feature Designator
 See Note 1 below
- S01 - Direct Mount to NAMUR
 Size 1 Actuator
- S02 - Spacer Mount to NAMUR
 Size 2 Actuator
- S03 - Adapter Plate Mount to NAMUR
 Size 3 Actuator
- S04 - Adapter Plate Mount to NAMUR
 Size 4 Actuator

NOTES

* - Consult Factory for Availability

Part Number Compilation:

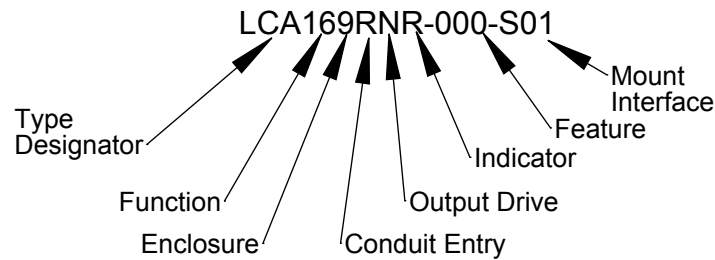

NOTE 1:

The exact detail of such things as number of switches/terminal points fitted in the monitor is not fully specified by the basic part number. The 'feature designator' provides a mechanism for cross-referencing to a centralised log establish the exact configuration of a given unit.

REV	DRAWN	DATE	CHK'D	ECO
	PT	1.2.18		18-2692

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 SURFACE FINISH: 3.2 microns
 TOLERANCES:
 LINEAR: ±0.25mm
 ANGULAR: ±0.5°

TITLE:

Type LCA - Master Model Description

This private & confidential drawing is the property of Imtex Controls Limited, Tonbridge, UK and cannot be copied or reproduced without the express written permission of the Company.

Imtex Controls Limited
 Tel: +44(0)8700-340002

Website: www.imtex-controls.com

DEBUR AND
 BREAK SHARP
 EDGES

MATERIAL:

WEIGHT(g):

DWG NO.

A190363

SCALE:1:1

SHEET 1 OF 1

REV	-
STATUS	-
	A4